


5. Mounting the Eyepiece Hood Frame

Necessary tools: Metric Allen Key size 2.0

What you have to do:

1) Place the Display Frame on the LCD Display with the longer pin on the upper right side

2) Add the four screws and fix them

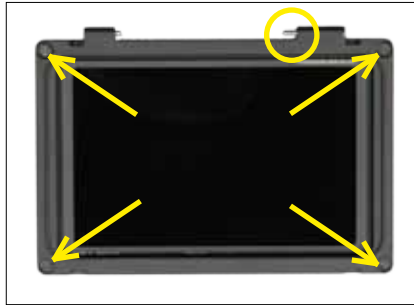

6. Technical Specifications

P+S TECHNIK takes no responsibilities for technical specifications changes of TV Logic

| | |
|--------------------|---|
| Input: | 3G-SDI, HD-SDI, SDI, HDMI, 1080p/1080i/720p-60 |
| Resolution: | 1280*800 |
| Contrast Ratio: | 500:1 |
| Power consumption: | 12W |

7. Manufacturer Information

The manufacturer of the LCD Display 5,6" is TVLogic (www.tvlogic.tv)

The manufacturer of Pos.No. 2-4 is:

P+S Technik GmbH
Siemensstrasse 12
85521 Ottobrunn / Munich Germany.
Phone: +49 89 45 09 82 30

Please find worldwide authorised representations and dealers on our homepage www.pstechnik.de or send an e-mail to info@pstechnik.de for contact details. Concerning any service and warranty requests, please contact your local representation or P+S Technik GmbH directly.



User Manual

for PS-Cam Viewfinder

ENGLISH

Before operating this product, please read the instruction carefully and save this manual for future use. Subject to technical change without any prior notice.

1. About

The PS-Cam X35 Viewfinder is designed for the use with professional digital film cameras. The Eyepiece Hood can be mounted and removed within seconds without the use of tools. The PS-Cam X35 Viewfinder can be mounted quite easy with a flex arm on your camera or other equipment. Eyepieces with diopter correction are available (planned). The display has a Full HD resolution and shows the true pixel image without any downsizing. Furthermore the display provides some helpful functions to control and calibrate the image of your camera such as Focus Assist, Scan Modes, Markers, SDI Loop and Level Checks.

For further information refer to the TV Logic LCD Display User Manual.

2. Delivery Content

| Pos.No. | Art.No. | Description | Amount |
|---------|---------|--|--------|
| 1 | 28034 | LCD Display 5,6 " TV Logic complete with Display Frame Mounted | 1 |
| 2 | 28042 | Eyepiece hood complete for LCD Display 5,6 " TV Logic | 1 |
| 3 | 11487 | Eyepiece, large version without shutter | 1 |
| 4 | 28035 | PS-Power Supply Cable for for LCD Display 5,6 " TV Logic | 1 |
| 5 | 28057 | BNC-Cable 75 Ohm 300mm | 1 |



3. Optional Accessories

| Art.No. | Description | Amount |
|---------|-------------------------------------|--------|
| 11489 | Eyepiece with heating 12V | 1 |
| 19091 | Eyepiece with heating 24V | 1 |
| 11724 | Cable for Eyepiece with heating 12V | 1 |
| 11767 | Cable for Eyepiece with heating 24V | 1 |
| 23063 | NOGA-Flex Arm, P+S modified | 1 |

4. Mounting the Eyepiece Hood

1) Put the Eyepiece onto the Eyepiece Hood carefully.



3) Tilt the Eyepiece Hood between the pins of the display frame



2) Put the Eyepiece Hood on the longer pin of the Display Frame and push the pin down gently



4) Let the Eyepiece Hood snap into the Display Frame

